

IN THE UNITED STATES PATENT & TRADEMARK OFFICE

*Handwritten:* #3 03/22/02

Serial No.:	Filed:	Inventor(s):	Atty Dkt:
09/870,135	May 30, 2001	Christopher C.N. Callow	1805-004
Title: "A CUTTING MACHINE FOR BRICK MAKING"			Examiner:
			NA
			Art Unit: 3724

Commissioner of Patents & Trademarks  
Asst. Commissioner for Patents  
2900 Crystal Drive  
Arlington, VA 22202-3550

RECEIVED  
JAN 15 2002  
TC 3700 MAIL ROOM

SUBMISSION OF CERTIFIED COPY OF PRIORITY DOCUMENT

Dear Sir:

Attached is the Certified copy of Australian application number PQ 7839 filed May 30, 2000, upon which priority is based for the above-referenced application.

**CERTIFICATE OF MAILING**

I hereby certify that this correspondence is being deposited with the United States Postal Service as First Class Mail in an envelope addressed to: Asst. Comm'r for Patents, 2900 Crystal Drive, Arlington, VA 22202-3550

On: 4 January 2002

By: Heather A. McLennand


Signature: *Heather A. McLennand*

Respectfully submitted,

*Alfred Basichas*

Alfred Basichas  
Reg. No. 38,771  
Morgan Lewis & Bockius, LLP  
60 East 42nd Street  
New York, NY 10165  
212-551-5000  
fax 212-949-2795

4 January 2002



## CERTIFIED COPY OF PRIORITY DOCUMENT

Patent Office  
Canberra

I, JONNE YABSLEY, TEAM LEADER EXAMINATION SUPPORT AND SALES hereby certify that annexed is a true copy of the Provisional specification in connection with Application No. PQ 7839 for a patent by BORAL BRICKS (NSW) PTY. LTD. filed on 30 May 2000.



WITNESS my hand this  
Twenty-fifth day of May 2001

*J R Yabsley*

JONNE YABSLEY  
TEAM LEADER EXAMINATION  
SUPPORT AND SALES

BEST AVAILABLE COPY

**ORIGINAL**

**AUSTRALIA**

**Patents Act 1990**

**PROVISIONAL SPECIFICATION FOR THE INVENTION ENTITLED:**

A Cutting Machine for Brick Making

---

Name and Address of Applicant:

Boral Bricks (NSW) Pty. Ltd., an Australian company, ACN 001 145 473, of  
Nuwarra Road, Moorebank, NSW, 2170, Australia

Name of Inventor:

This invention is best described in the following statement:

# A CUTTING MACHINE FOR BRICK MAKING

## Technical Field

The present invention relates to cutting machines for brick making.

## Background of the Invention

5 In the manufacture of bricks, a slug is extruded and is delivered to a wire-cutting machine. The slug is moved transversely of its longitudinal length through the wire-cutting machine to slice the slug into individual "green" bricks. The wire-cutting machine includes a frame having top and bottom generally horizontal co-extensive vertically spaced beams between which tensioned wires pass. The wires are generally  
10 parallel and horizontally spaced. The wires pass through the slug so that the slug is transversely sliced into individual "green" bricks.

The above mentioned apparatus has the disadvantage that when a slug is delivered to the wire-cutting apparatus, only "green" bricks having planar faces and sharp edges are formed.

## 15 Object of the Invention

It is the object of the present invention to overcome or substantially ameliorate the above disadvantage.

## Summary of the Invention

There is disclosed herein a wire-cutting apparatus for brick manufacturing, said  
20 apparatus including:

a pair of generally vertically spaced elongated beams held in a generally parallel co-extensive spaced relationship;

a plurality of tensioned spaced slug cutting wires attached to and extending between the beams, the wires being located at spaced locations along the beams; and

25 at least one blade mounted on one of the beams to engage the slug to form a slot in a green brick being formed.

Preferably, the or each blade is mounted adjacent a wire.

Preferably, the or each blade has a passage through which an associated wire passes.

Preferably, the or each blade engages the slug so as to form the slot along a corner of the "green" brick being formed.

5

### **Brief Description of the Drawings**

A preferred form of the present invention will now be described by way of example with reference to the accompanying drawings wherein:

Figure 1 is a schematic front elevation of a wire-cutting apparatus for brick manufacture;

10 Figure 2 is a schematic end elevation of the apparatus of Figure 1 sectioned along the line A-A;

Figure 3 is a schematic end elevation of the apparatus of Figure 1;

Figure 4 is a schematic end elevation of a blade employed in the apparatus of Figures 1 to 3;

15 Figure 5 is a schematic top plan view of the blade of Figure 4; and

Figure 6 is a schematic side elevation of the blade of Figure 4.

### **Detailed Description of the Preferred Embodiments**

In the accompanying drawings there is schematically depicted a wire-cutting apparatus 10 used in the manufacture of bricks. More particularly the apparatus 10 cuts a  
20 clay slug into individual "green" bricks. The slug would be formed by a clay-extruding machine which would deliver the slug to a conveyor. The slug is moved to a position adjacent the apparatus 10 and is then pushed through the apparatus 10 in a direction generally perpendicular to the longitudinal direction of extension of the slug.

The apparatus 10 has a frame 11 including a pair of upright members 12 between  
25 which there extends a pair of parallel generally co-extensive beams 13 and 14 which are vertically spaced. Attached to and extending between the beams 13 and 14 are generally vertical cutting wires 15 arranged at equally horizontally spaced locations along the beams 13 and 14. Each wire 15 has its lower extremity fixed to the beam 13, while mounted on the beam 14 are tensioning apparatus 16 to which the upper end of each wire

15 is attached. The apparatus 16 is operable to tension each wire 15 so as to maintain it taut during formation of the "green" bricks.

The apparatus 10 further includes delivery plates 17 and 18 along which the slug moves in the direction of the arrow 19 to be cut by the wires 15. The green bricks exit via outlet plates 20 and 21. The plate 21 diverges upwardly relative to the plate 20, while the plate 18 has an inclined entrance portion relative to the plate 17.

The apparatus 16 includes a mounting member 22 which has a longitudinally extending slot 23 of "T" transverse cross-section. Mounted on the member 22 is a tension member 24 having a flange 25 with a slot generally perpendicular to the slot 23. A threaded fastener 26 passes through the slot in the flange 25 to enter the slot 23. A head on the threaded fastener 26 enables the threaded fastener 26 to be tensioned to secure the member 24 in position fixed to the member 22. An extremity of the member 22 has fixed to it the upper end of an associated wire 15. Adjustable movement of the member 24 relative to the member 22 enables tensioning of the wire 15.

Mounted on the lower beam 13 are lower blades 27 while mounted on the upper beam 14 are upper blades 28. Each of the blades 27 and 28 has a passage 29 through which the associated wire 15 passes. The blades 29 displace the wire 15 laterally relative to a plane passing through the mounting points 30 that attach each wire 15 to the lower beam 13 and the associated tensioning apparatus 16.

Each blade 27 and 28 is of a "U" configuration so as to have a generally planar side wall 32 joined to a shaped side wall 30 by means of a base 31. The base 31 is provided with a leading edge 33 while the side walls 30 and 32 terminate with an inclined face 34. Located between the side walls 30 and 32 is a space 35 through which removed clay passes. Each passage 29 extends diagonally through the side wall 30.

The side wall 30 is provided with an arcuate recess 36 which provides an arcuate projection on the side of the "green" brick being formed. The base 31 and the side wall 32 form a step in the respective corners of the "green" brick being formed.


**Dated 30 May, 2000**

**Boral Bricks (NSW) Pty Ltd**

**Patent Attorneys for the Applicant/Nominated Person**

**SPRUSON & FERGUSON**

Fig 1

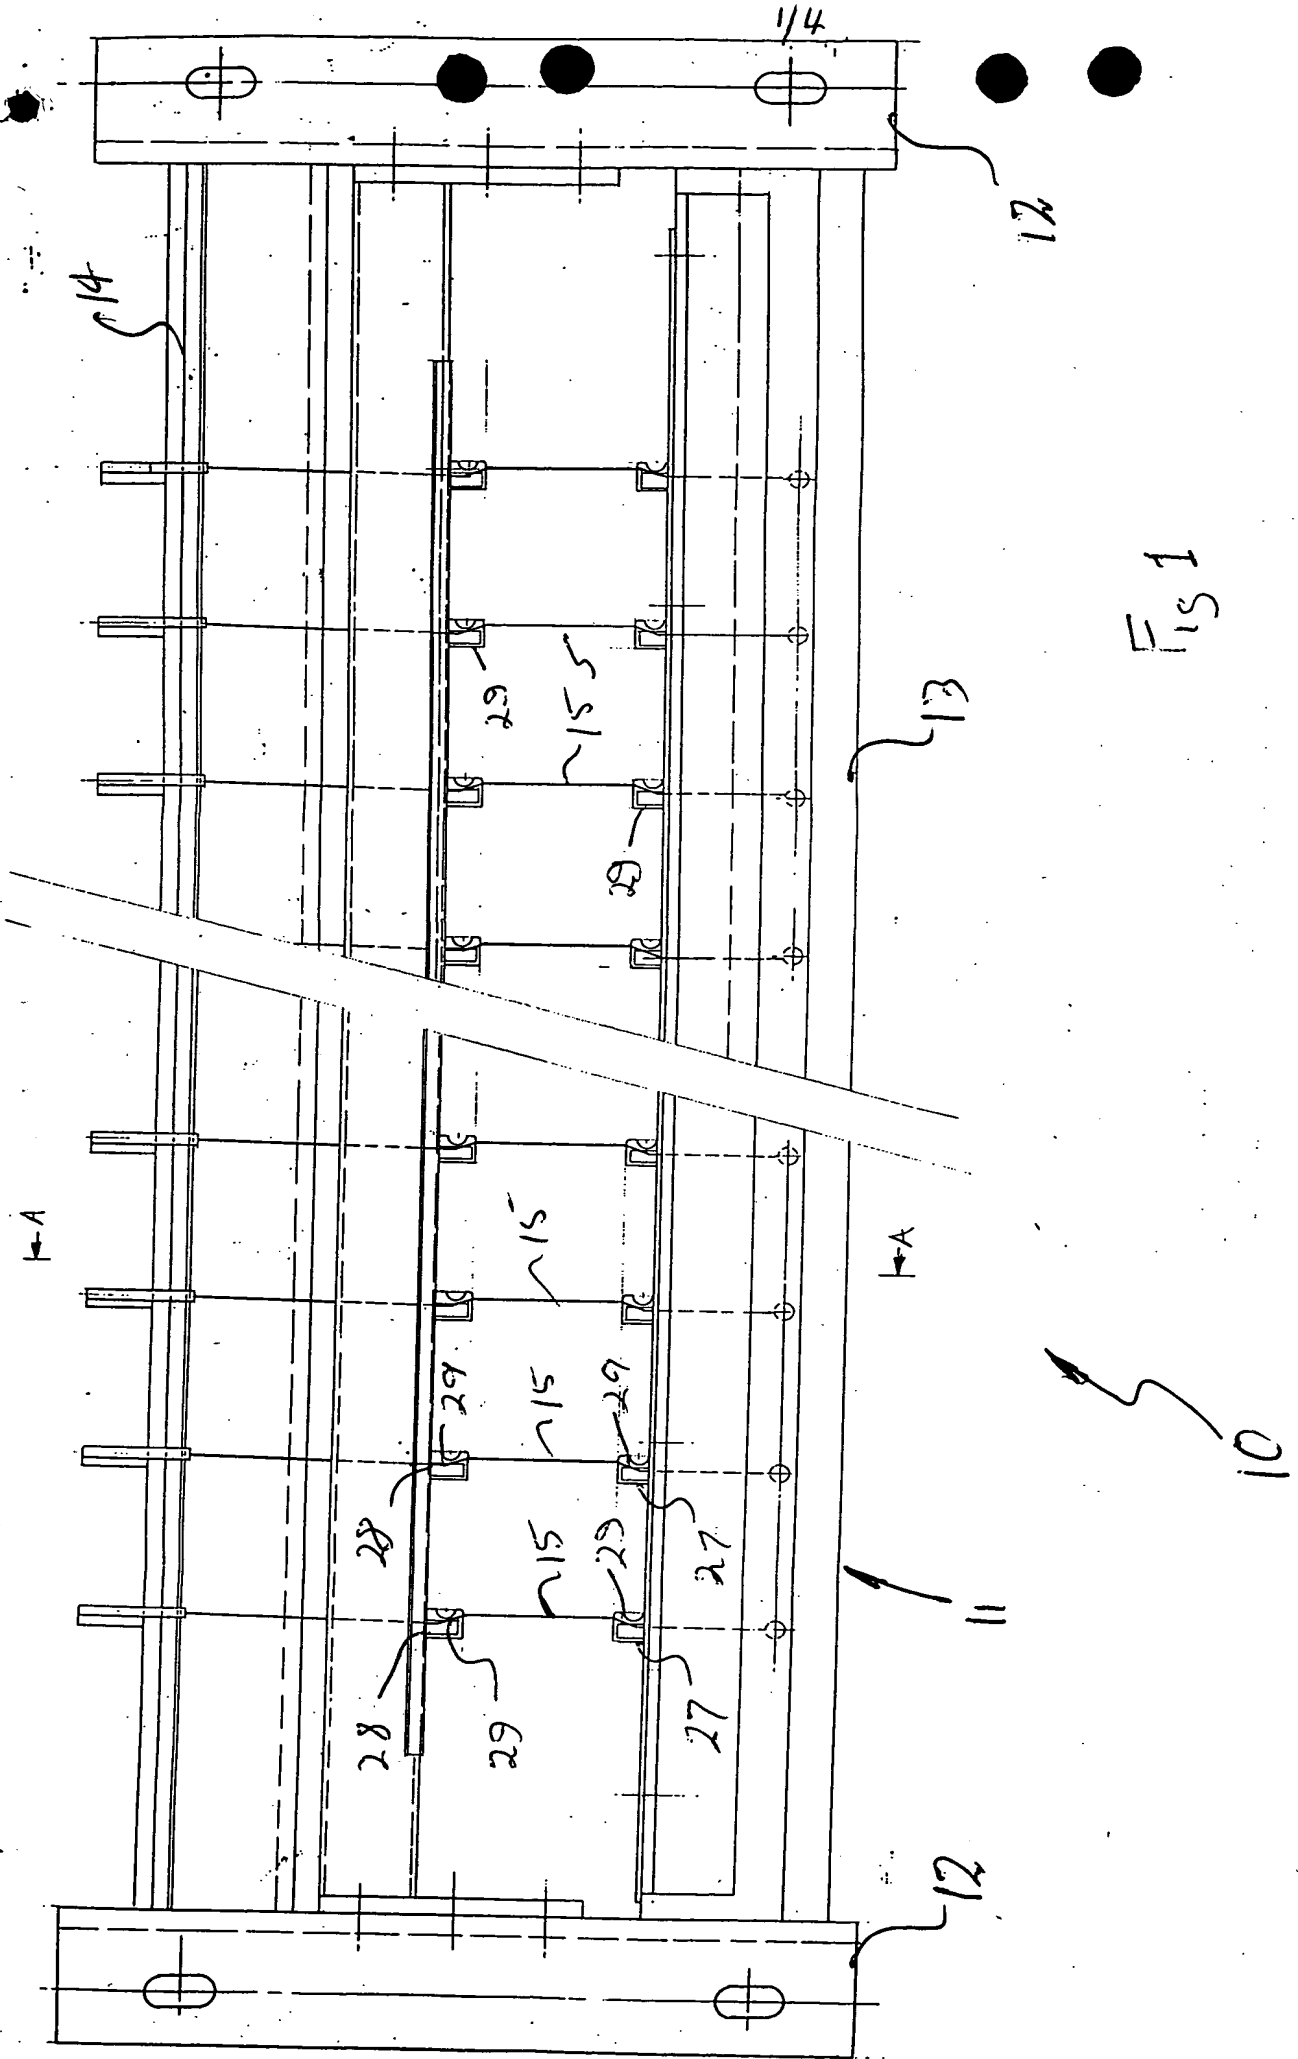





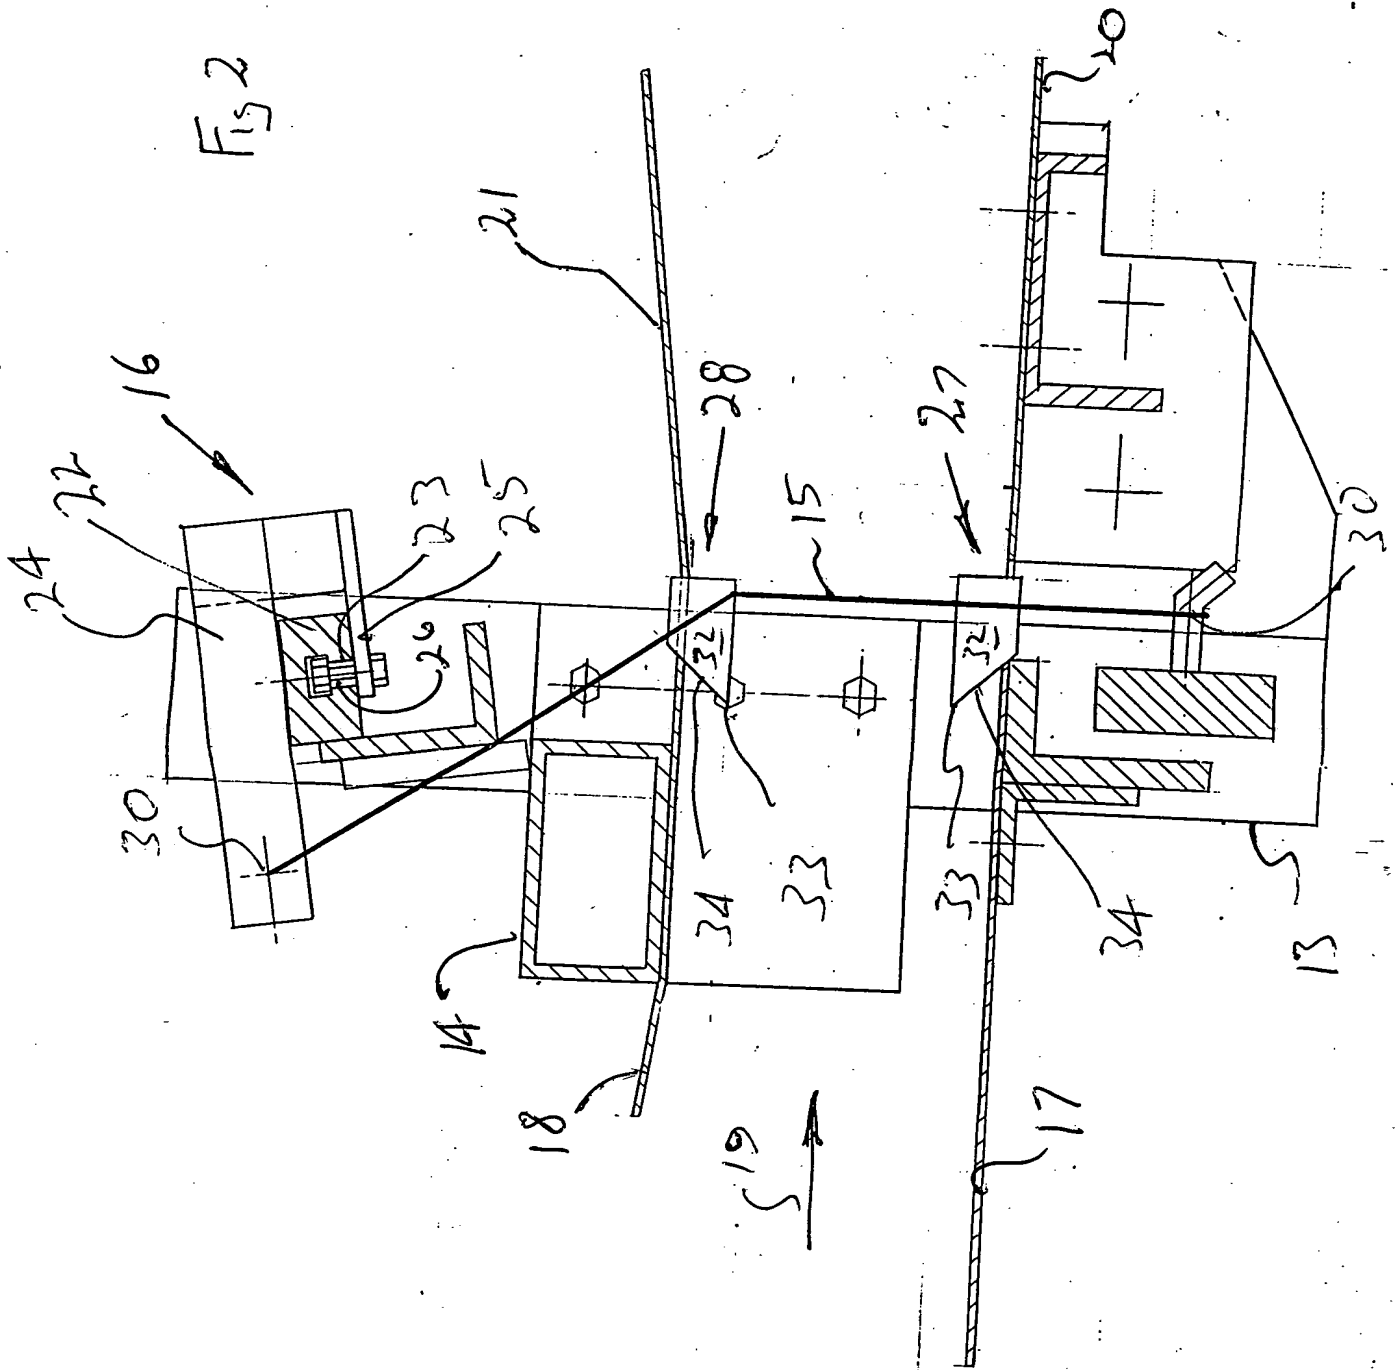




Fig 3

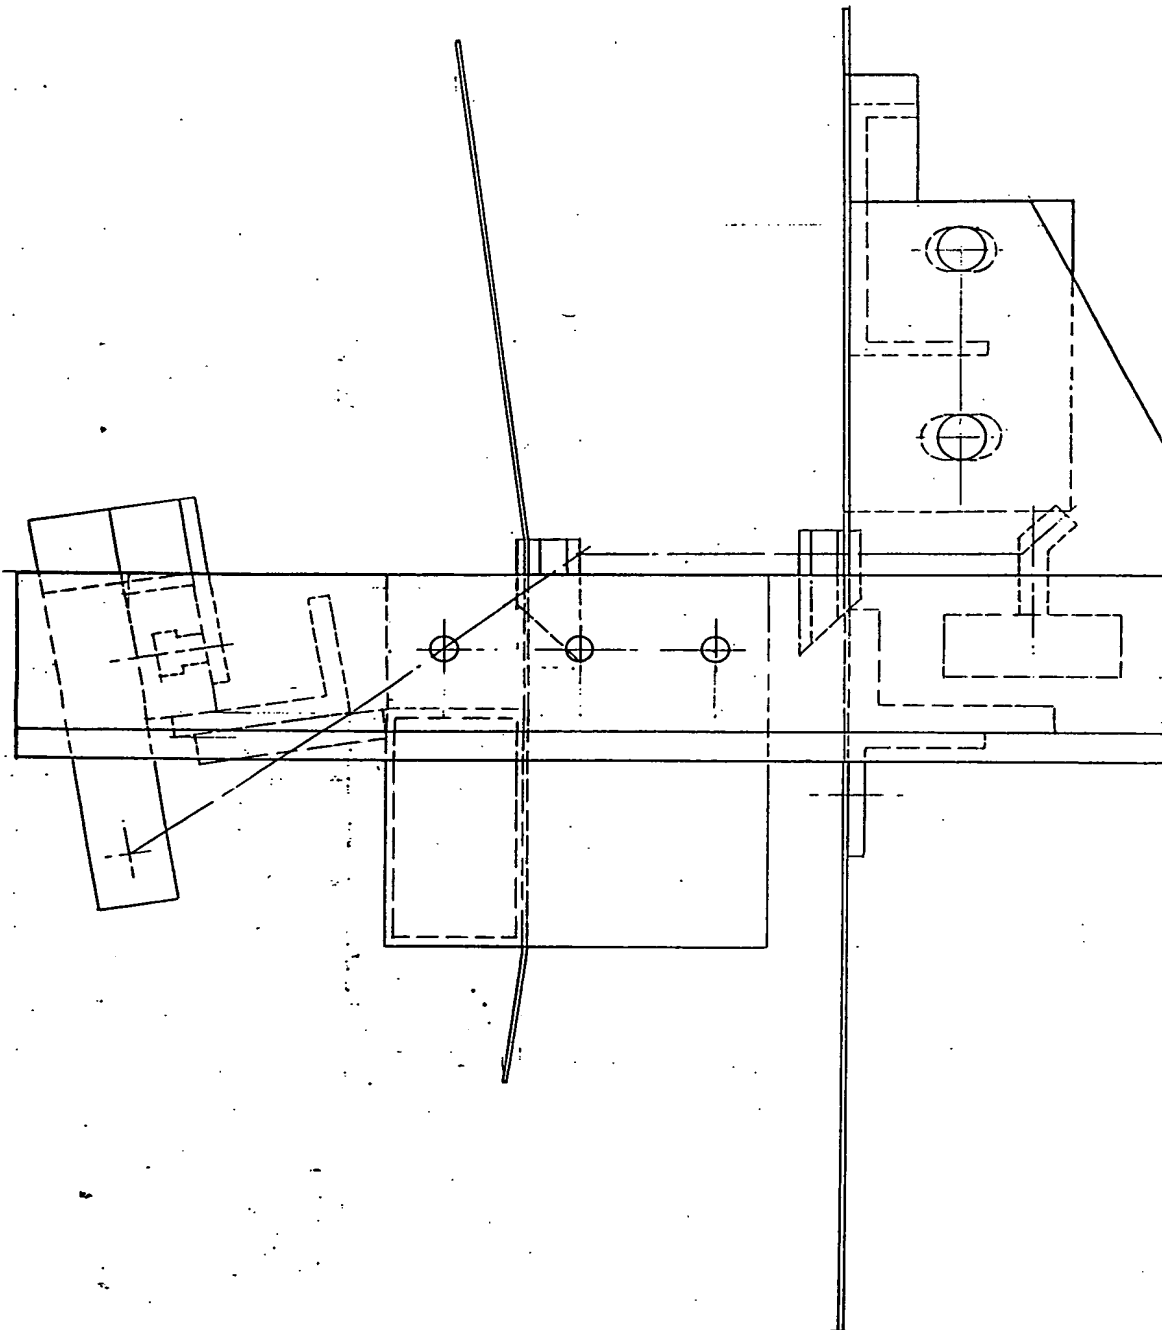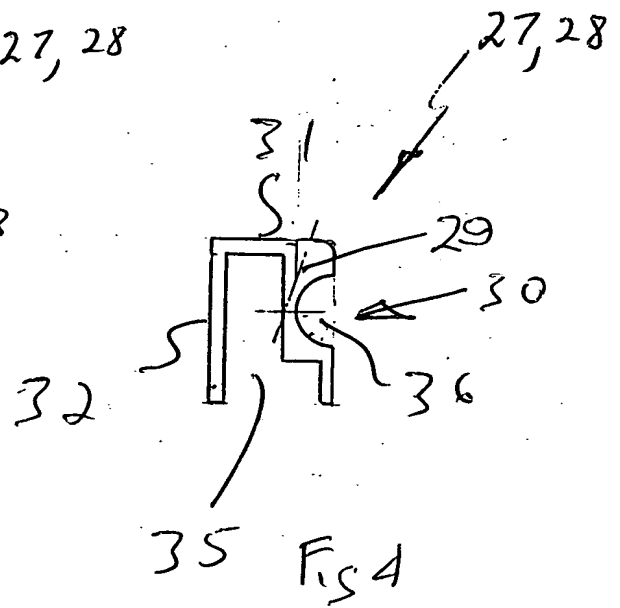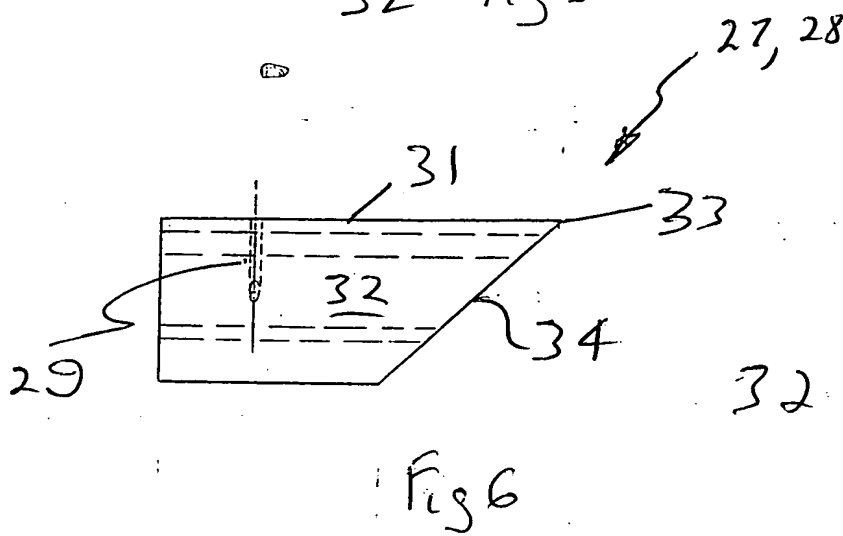

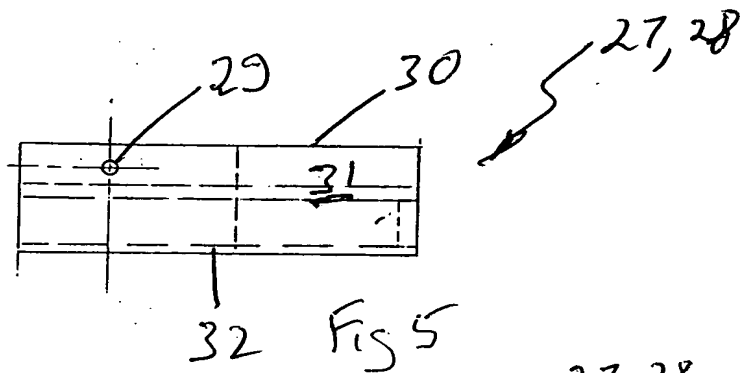

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**